
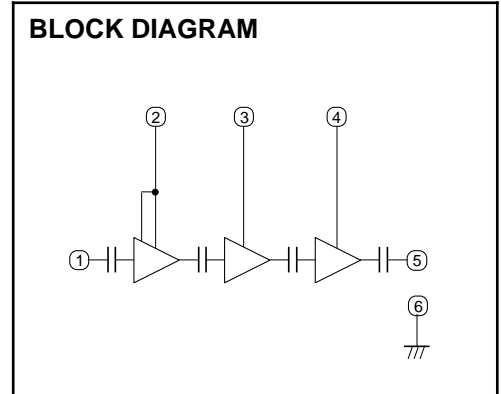


MITSUBISHI RF POWER MODULE  
**M68762L**

400-450MHz, 12.5V, 30W, FM MOBILE RADIO

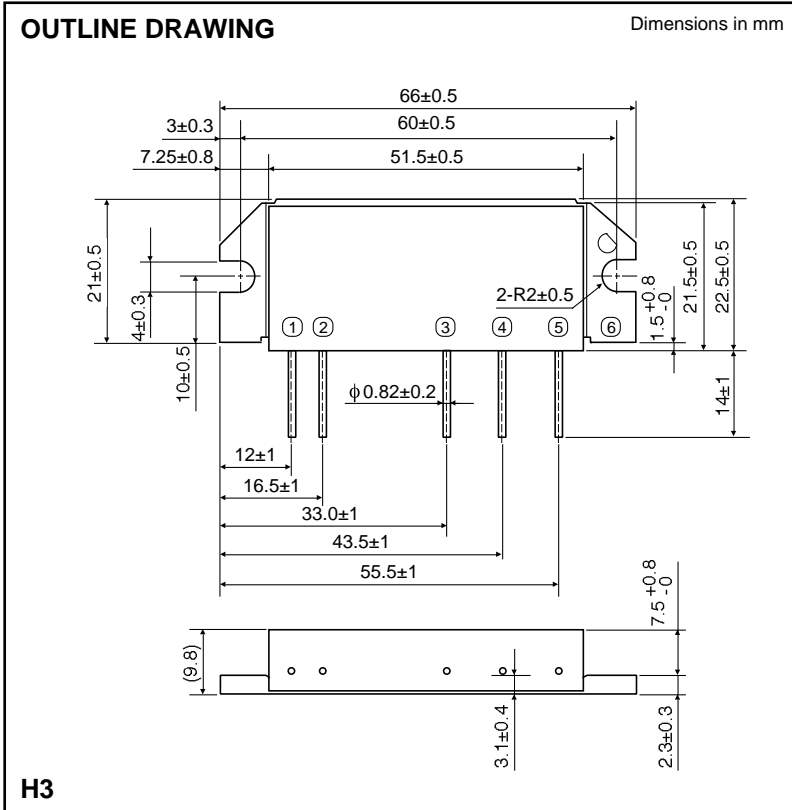

- PIN:
- ① Pin : RF INPUT
  - ② Vcc1: 1st. DC SUPPLY
  - ③ Vcc2: 2nd. DC SUPPLY
  - ④ Vcc3: 3rd. DC SUPPLY
  - ⑤ Po : RF OUTPUT
  - ⑥ GND: FIN

**ABSOLUTE MAXIMUM RATINGS** (Tc=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
Vcc	Supply voltage	ZG=ZL=50	17	V
Icc	Total current	ZG=ZL=50	10	A
P <sub>in</sub> (max)	Input power	ZG=ZL=50 , Vcc1 12.5V	600	mW
P <sub>o</sub> (max)	Output power	ZG=ZL=50 , Vcc1 12.5V	40	W
T <sub>c</sub> (OP)	Operation case temperature	ZG=ZL=50 , Vcc1 12.5V	-30 to +110	°C
T <sub>stg</sub>	Storage temperature		-40 to +110	°C

Note. Above each maximum ratings are guaranteed independently.

**ELECTRICAL CHARACTERISTICS** (Tc=25°C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range		400	450	MHz
P <sub>o</sub>	Output power		30		W
η	Total efficiency		40		%
2fo	2nd. harmonic	Vcc=12.5V, P <sub>in</sub> =300mW, ZG=ZL=50		-30	dBc
3fo	3rd. harmonic			-30	dBc
in	Input VSWR			2.8	-
-	Load VSWR tolerance	Vcc=15.2V, P <sub>o</sub> =30W (P <sub>in</sub> :Controlled), ZG=50 , Load VSWR=20:1 (All phase)	No degradation or destroy		-

Note. Above parameters, ratings, limits and test conditions are subject to change.

**TYPICAL PERFORMANCE DATA**

