
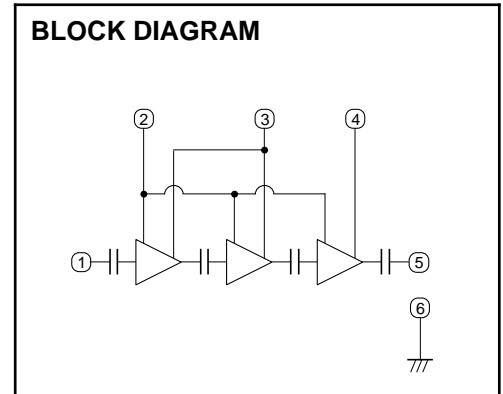


MITSUBISHI RF POWER MODULE  
**M57716L**

360-380MHz, 12.5V, 13W, DIGITAL MOBILE RADIO

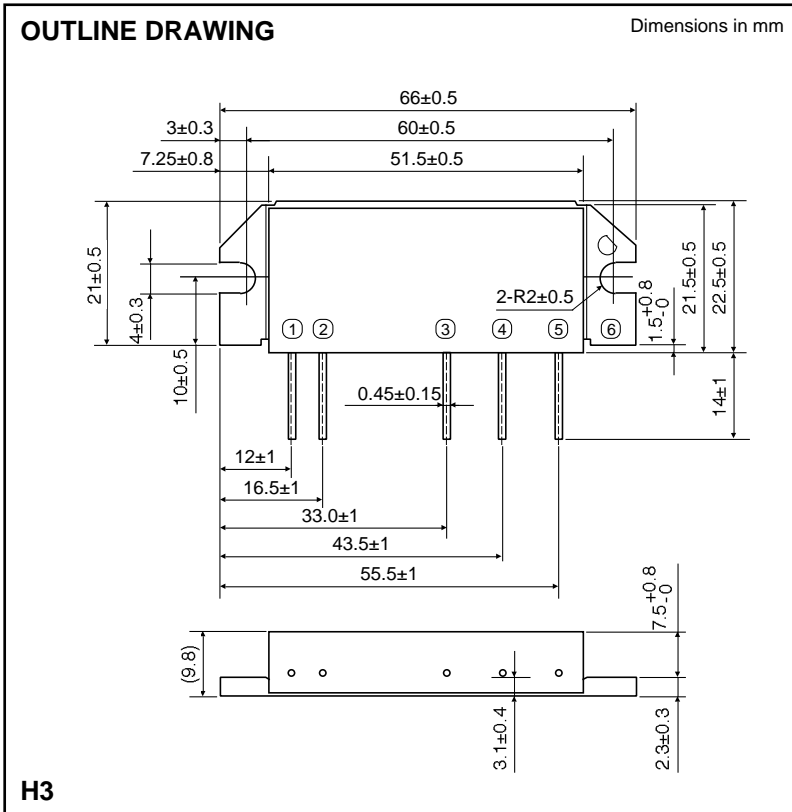

- PIN:
- ① Pin : RF INPUT
  - ② VBB : BASE BIAS SUPPLY
  - ③ VCC1: 1st. DC SUPPLY
  - ④ VCC2: 2nd. DC SUPPLY
  - ⑤ Po : RF OUTPUT
  - ⑥ GND: FIN

**ABSOLUTE MAXIMUM RATINGS** (T<sub>c</sub>=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
V <sub>CC</sub>	Supply voltage	Z <sub>G</sub> =Z <sub>L</sub> =50 , V <sub>BB</sub> =9V	17	V
V <sub>BB</sub>	Bias voltage	Z <sub>G</sub> =Z <sub>L</sub> =50 , V <sub>CC</sub> 12.5V	9.5	V
I <sub>CC</sub>	Total current	Z <sub>G</sub> =Z <sub>L</sub> =50	6	A
P <sub>in (max)</sub>	Input power	Z <sub>G</sub> =Z <sub>L</sub> =50 , V <sub>CC</sub> 12.5V, V <sub>BB</sub> =9V	300	mW
P <sub>O (max)</sub>	Output power	Z <sub>G</sub> =Z <sub>L</sub> =50 , V <sub>CC</sub> 12.5V, V <sub>BB</sub> =9V	20	W
T <sub>C (OP)</sub>	Operation case temperature	Z <sub>G</sub> =Z <sub>L</sub> =50	-30 to +110	°C
T <sub>stg</sub>	Storage temperature		-40 to +110	°C

Note. Above parameters are guaranteed independently.

**ELECTRICAL CHARACTERISTICS** (T<sub>c</sub>=25°C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range		360	380	MHz
P <sub>O</sub>	Output power	P <sub>in</sub> =200mW, V <sub>CC</sub> =12.5V, V <sub>BB</sub> =9V, Z <sub>G</sub> =Z <sub>L</sub> =50	13		W
η	Total efficiency	V <sub>CC</sub> =12.5V, V <sub>BB</sub> =9V, P <sub>O</sub> =4W (P <sub>in</sub> :controlled) Z <sub>G</sub> =Z <sub>L</sub> =50	15		%
2f <sub>o</sub>	2nd. harmonic	P <sub>in</sub> =200mW, V <sub>CC</sub> =12.5, V <sub>BB</sub> =9V, Z <sub>G</sub> =Z <sub>L</sub> =50		-30	dBc
3f <sub>o</sub>	3rd. harmonic			-30	dBc
S <sub>in</sub>	Input VSWR			2.5	-
G <sub>p</sub>	Power gain	P <sub>in</sub> =10dBm, V <sub>CC</sub> =12.5V, V <sub>BB</sub> =9V, Z <sub>G</sub> =Z <sub>L</sub> =50	27		dB
IMD3	3rd. internal modulation	V <sub>CC</sub> =12.5V, V <sub>BB</sub> =9V, P <sub>O</sub> (AVE)=4W, (P <sub>in</sub> :controlled) 2tone, f=2kHz, Z <sub>G</sub> =Z <sub>L</sub> =50		-25	dBc
-	Load VSWR tolerance	V <sub>CC</sub> =14.4V, V <sub>BB</sub> =9V, P <sub>O</sub> =10W (P <sub>in</sub> :controlled) Z <sub>G</sub> =50 , Load VSWR=8:1 (All phase)	No degradation or destory		-
-	Stability	P <sub>in</sub> =0-300mW, V <sub>CC</sub> =10.8-13.2V, V <sub>BB</sub> =9V, P <sub>O</sub> 20W   3.0 (All phase), Z <sub>G</sub> =50	No parastic oscillation		Note 1

Note. Above parameters, ratings, limits and test conditions are subject to change.

Note 1. Stability is tested by sampling test (10pcs/Lot)

**TYPICAL PERFORMANCE DATA**

